

1

Ceiling/Soffitto

2

Wall/Parete

3

4

5

6

Wall with brackets
Parete con squadrette

7

8

9

MAX.12,9

MIN.8,2

10

NO

OK

Max Ø8,00 mm

12

TO KEEP IF USED ON TRACKS
WITH GUIDING SLOT

DA UTILIZZARE CON I BINARI CON CAVA

11

16

TO KEEP CUT IF USED ON TRACKS
WITHOUT GUIDING SLOT

TAGLIARE CON I BINARI SENZA CAVA

13

14

17

15Nm

⚠ CORRECT POSITIONING



Vetro 40

WITH FLUID[®]
TECHNOLOGY

MOD. SYSTEM VETRO 40 7002.06970 REV. 00



Sliding system for glass doors with clamp height 40mm.

Scorrevoli per porte in vetro senza forature e pinza alta 40mm.



Growth is based on respect, protection is a duty. / La crescita si basa sul rispetto, proteggere è un dovere.



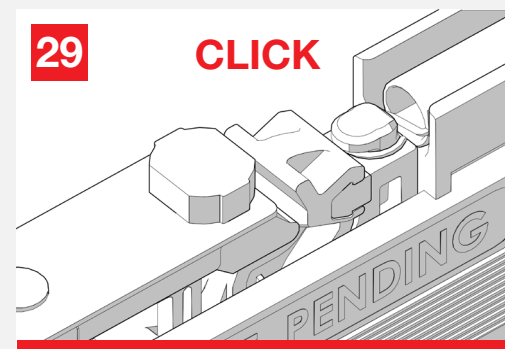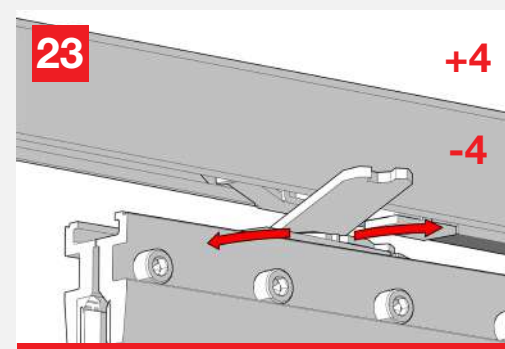

CLOSE THE DOOR SLOWLY AT FIRST AUTOMATIC LOAD AFTER INSTALLATION
CHIUDERE LA PORTA LENTAMENTE AL PRIMO CARICAMENTO AUTOMATICO DOPO L'INSTALLAZIONE

