


## Flap stay



- > With automatic closing spring or Push version
- > Integrated soft opening mechanism in opening direction
- > Without additional hinge connection
- > Flap and base panel are on one level in open position




- > Material: Cup and hinge arm: Zinc alloy
- > Finish: Nickel plated
- > Installation: Flap for clipping onto cabinet
- > Drilling depth: 13 mm
- > Adjustment facility: Side adjustment from -1.5 to +1.5 mm, height adjustment from -1.5 to +1.5 mm, depth adjustment from -0.5 to +2.8 mm
- > Overlay: 17 mm (fixed)
- > Flap height: 280–400 mm
- > Flap width: ≤900 mm

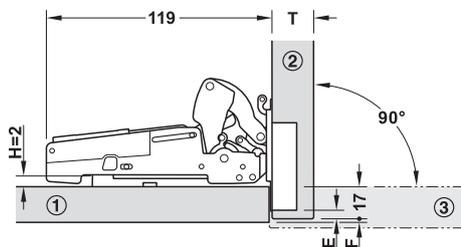

Door thickness mm	16	17	18	19	20	21	22	23	24	25	26	27	28
Distance to cup E (fixed) 4.5 mm	1.3	2.1	3.0	3.9	4.8	5.7	6.6	7.5	8.5	9.4	10.4	11.3	12.3
<b>Minimum gap F</b>													

- ① Base panel
- ② Flap in closed position
- ③ Flap in open position

### Drilling pattern

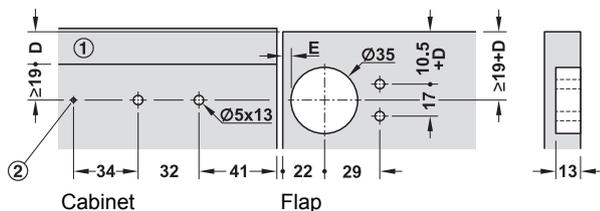

- ① Side panel
- ② Safety lock screw

D = overlay

### Load bearing capacity table

Flap height KH mm	Model A	Model B	Model C
280	2.8–4.3	4.3–6.6	6.7–9.5
300	2.6–4.1	4.1–6.2	6.2–8.9
320	2.5–3.9	3.8–5.8	5.8–8.3
340	2.3–3.7	3.7–5.4	5.4–7.9
360	2.2–3.5	3.6–5.0	5.0–7.4
380	2.1–3.3	3.5–4.7	4.7–7.0
400	2.0–3.1	3.3–4.5	4.5–6.6
Flap weight kg			

### Supplied with

- 2 hinges
- 2 mounting plates
- 2 soft opening mechanisms
- Accessories/fixing set

Model	Push	
	With automatic closing spring	Without automatic closing spring
A	365.13.700	365.13.710
B	365.13.701	365.13.711
C	365.13.702	365.13.712

Packing: 1 piece

### Order reference

Please order Push magnetic push catch separately.

Push magnetic push catch

► MB 5.55